

### **Applications**

*Small Meeting Rooms  
Training Centers  
School Classrooms*



### **Sales Support**

*Need help finding integration solutions for your application? Our Sales Support staff will be happy to work with you, providing expert integration assistance and a complete systems proposal.*

### **Tech Support**

*Need tech help? Give us a call. Our tech support staff are experts in the integration industry, so we can research solutions in the proposal stage, advise on programming requirements, and resolve installation issues.*

*Our job is to make our solutions work seamlessly with your system, performing as promised.*

### **Related Products**

*232-Amp Stereo Mixer/Amplifier  
PoleVault Projector Integration Tools*



The SA-615A Ceiling Speaker is the perfect partner for 232-Amp Stereo Mixer/Amplifier installations. The highly efficient coaxial 6.5" speaker delivers maximum music-quality, intelligible sound with a minimum of watts. Superb 144-degree dispersion offers large-area coverage with just a few speakers.

Installation is a snap. Just mount the UL-listed, plenum-compatible enclosure to the included tile bridge, snap the back can's swivel clamps to lock the assembly to the tile, then click in the white grille from the front. Hook up the wires on the outside of the enclosure, and you're done.

### **Features**


- Coaxial 6.5" ceiling speaker for 232-Amp audio applications
- Efficient design delivers 91 dB SPL with 144° dispersion
- 8 ohm Impedance
- Swivel clamps lock assembly to ceiling
- Complete system includes speaker installed in plenum-rated enclosure, tile bridge, and snap-in paintable white grill

### Specifications

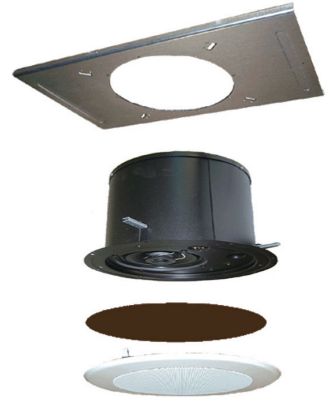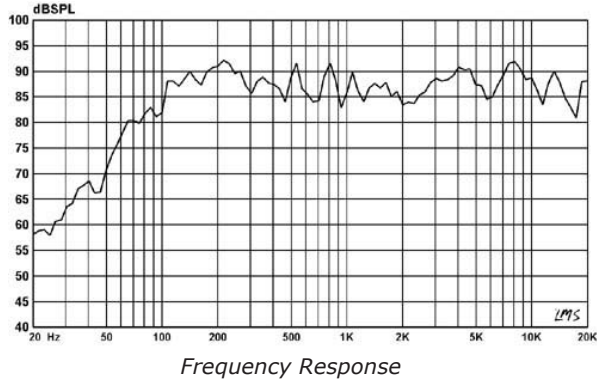

System Components

Features	
<b>Physical</b>	Type: 6.5" coaxial speaker Response: 65 Hz - 20 kHz] Impedance: 8 Ohms Power Handling: 20 Watts Sound Pressure Level: 91 dB (1w/1m) Average Dispersion: 144° @ 2 kHz Woofer Magnet Weight: 13 oz Voice Coil Diameter: 1" Woofer Magnet Material: Barium Ferrite Woofer Cone: Polypropylene Surround: Inverted rubber Tweeter: 13mm Polyamide Soft Dome Tweeter Magnet: Neodymium Boron Crossover: 5.0 kHz
<b>Enclosure</b>	Type: Metal, plenum-compatible Rating: UL 1480 and NEC NFPA-70 Size: 9.25" diameter [11.75 to flange] x 7 " height Mounting: Metal swivel clamps lock assembly to ceiling Grill: Snap-in mounting, white with included paint mask Wiring: 2-Gang electrical box on top with knockouts for conduit Total System Weight: 9 lbs
<b>Tile Bridge</b>	Type: Metal Size: 23.75" long x 14 " wide
<b>Includes</b>	6.5" coaxial speaker mounted in back can, external wiring for installation Plenum-rated back can Tile Bridge Paint Mask White snap-in grill

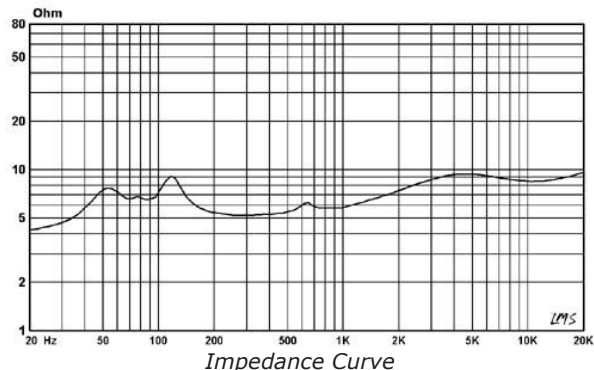

### Warranty

All CR products feature a full two-year warranty.